

## **Approval body for construction products and types of construction**

Bautechnisches Prüfamt

An institution established by the Federal and Laender Governments



## European Technical Assessment

**ETA-20/0731**  
**of 13 November 2020**

English translation prepared by DIBt - Original version in German language

## General Part

## Technical Assessment Body issuing the European Technical Assessment:

#### Trade name of the construction product

**Product family**  
to which the construction product belongs

## Manufacturer

## Manufacturing plant

This European Technical Assessment contains

This European Technical Assessment is issued in accordance with Regulation (EU) No 305/2011, on the basis of

Deutsches Institut für Bautechnik

AnkaScrew Xtrem

## Mechanical fasteners for use in concrete

Ramset Reid  
1 Ramset Drive  
CHIRNSIDE PARK, VIC 3116  
AUSTRALIEN

## Plant 1

22 pages including 3 annexes which form an integral part of this assessment

EAD 330232-00-0601, Edition 10/2016

The European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction shall be identified as such.

This European Technical Assessment may be withdrawn by the issuing Technical Assessment Body, in particular pursuant to information by the Commission in accordance with Article 25(3) of Regulation (EU) No 305/2011.

## Specific Part

### 1 Technical description of the product

The concrete screw AnkaScrew Xtrem respectively SPIT TAPCON XTREM is an anchor in size 6, 8, 10, 12 and 14 mm made of galvanised steel respectively steel with zinc flake coating, made of stainless or high corrosion resistant steel. The anchor is screwed into a predrilled cylindrical drill hole. The special thread of the anchor cuts an internal thread into the member while setting. The anchorage is characterised by mechanical interlock in the special thread. Product and product description are given in Annex A.

### 2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

### 3 Performance of the product and references to the methods used for its assessment

#### 3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic resistance to tension load (static and quasi-static loading)	See Annex B 4, Annex C 1 and C 2
Characteristic resistance to shear load (static and quasi-static loading)	See Annex C 1 and C 2
Displacements and Durability	See Annex C 7 and Annex B 1
Characteristic resistance and displacements for seismic performance categories C1 and C2	See Annex C 3, C 4, C 5 and C 8

#### 3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Class A1
Resistance to fire	See Annex C 6

European Technical Assessment

ETA-20/0731

English translation prepared by DIBt

Page 4 of 22 | 13 November 2020

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**

In accordance with European Assessment Document EAD No. 330232-00-0601 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1

**5 Technical details necessary for the implementation of the AVCP system, as provided for in the applicable European Assessment Document**

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited at Deutsches Institut für Bautechnik.

Issued in Berlin on 13 November 2020 by Deutsches Institut für Bautechnik



Dipl.-Ing. Beatrix Wittstock  
Head of Section

*beglaubigt:*  
Tempel


## Product in installed condition

### Ramset™ AnkaScrew™ Xtrem™


- Galvanized carbon steel
- Zinc flakes coated carbon steel

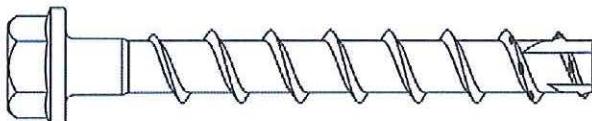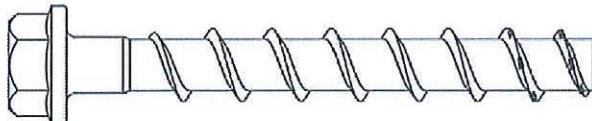

- Stainless steel A4
- Stainless steel HCR

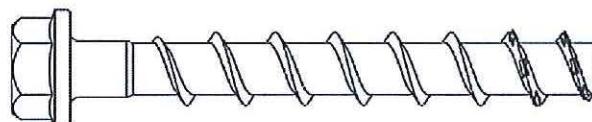

e.g. Ramset™ AnkaScrew™ Xtrem™, zinc flakes coated, with hexagon head and fixture

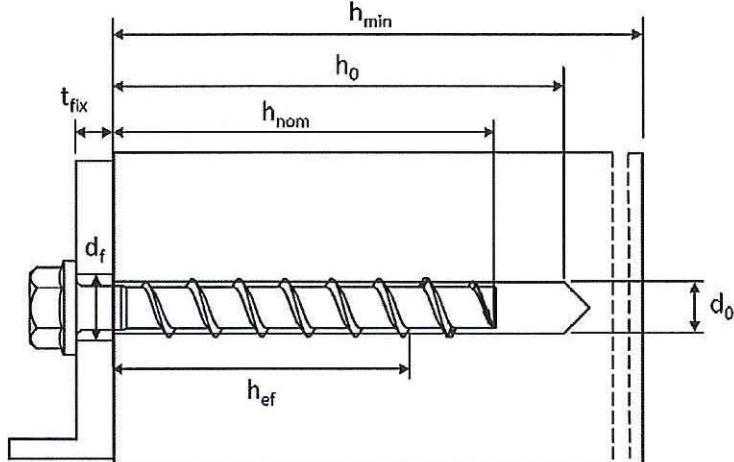

$d_0$  = nominal drill hole diameter

$h_{\min}$  = minimum thickness of member

$t_{fix}$  = thickness of fixture

$h_{nom}$  = nominal embedment depth

$d_f$  = clearance hole diameter

$h_0$  = drill hole depth







$h_{ef}$  = effective embedment depth

### Ramset™ AnkaScrew™ Xtrem™

#### Product description

Product in installed condition

Annex A1

		Configuration with metric connection threat and hexagon socket e.g. AS08105XM10
		Configuration with metric connection threat and hexagon drive e.g. AS08105XM10H
		Configuration with washer and hexagon head e.g. AS08080X
		Configuration with washer, hexagon head and TORX drive e.g. AS08080XT
		Configuration with washer and bund e.g. AS08080XBC
		Configuration with hexagon head e.g. AS08080XH
		Configuration with countersunk head and TORX drive e.g. AS08080XF
		Configuration with pan head and TORX drive e.g. AS08080XR
		Configuration with large pan head and TORX drive e.g. AS08080XLR
		Configuration with countersunk head and connection thread e.g. AS06055XM8CS
		Configuration with hexagon drive and connection thread e.g. AS06055XHN
		Configuration with internal thread and hexagon drive e.g. AS06055XMS

Ramset™ AnkaScrew™ Xtrem™

**Product description**  
Screw types

**Annex A2**

Table 1: Material

Part	Product name	Material		
all types	AnkaScrew Xtrem	- Steel EN 10263-4:2017 galvanized acc. to EN ISO 4042:2018 - Zinc flake coating according to EN ISO 10683:2018 ( $\geq 5\mu\text{m}$ )		
	AnkaScrew Xtrem A4	1.4401; 1.4404; 1.4571; 1.4578		
	AnkaScrew Xtrem HCR	1.4529		

Part	Product name	Nominal characteristic steel	Yield strength $f_{yk}$ [N/mm <sup>2</sup> ]	Ultimate strength $f_{uk}$ [N/mm <sup>2</sup> ]	Rupture elongation $A_5$ [%]
all types	AnkaScrew Xtrem	560	700	$\leq 8$	
	AnkaScrew Xtrem A4				
	AnkaScrew Xtrem HCR				

Table 2: Dimensions

Anchor size		6	8		10			12			14					
Nominal embedment depth		$h_{\text{nom}}$ [mm]	1 40	2 55	1 45	2 55	3 65	1 55	2 75	3 85	1 65	2 85	3 100	1 75	2 100	3 115
Screw length	$\leq L$	[mm]	500													
Core diameter	$d_K$	[mm]	5,1			7,1			9,1			11,1			13,1	
Thread outer diameter	$d_s$	[mm]	7,5			10,6			12,6			14,6			16,6	

**Marking:**

**AnkaScrew Xtrem**

Screw type:

TSM

**AnkaScrew Xtrem A4**

Screw type:

TSM

Screw size:

10

Screw size:

10

Screw length:


100

Screw length:

100

Material:

A4

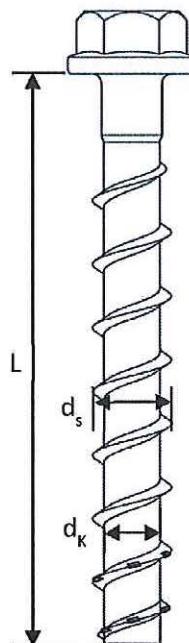

**AnkaScrew Xtrem BC ST**

screw type: TSM BC ST

**AnkaScrew Xtrem HCR**

Screw type: TSM

Screw size: 10


Screw size: 10

Screw length: 100

Screw length: 100

Material:

HCR



**Ramset™ AnkaScrew™ Xtrem™**

**Product description**

Material, Dimensions and markings

**Annex A3**

## Specification of Intended use

Table 3: Anchorages subject to

AnkaScrew Xtrem screw size		6		8		10			12			14				
Nominal embedment depth	[mm]	$h_{nom1}$	$h_{nom2}$	$h_{nom1}$	$h_{nom2}$	$h_{nom3}$										
		40	55	45	55	65	55	75	85	65	85	100	65	85	115	
Static and quasi-static loads		All sizes and all embedment depths														
Fire exposure		All sizes and all embedment depths														
C1 category - seismic		ok	ok			ok										
C2 category – seismic (A4 and HCR: no performance assessed)		x		x		ok		x		ok		x		ok		

### Base materials:

- Compacted reinforced and compacted unreinforced concrete without fibers according to EN 206:2013.
- Strength classes C20/25 to C50/60 according to EN 206:2013.
- Cracked and uncracked concrete.

### Use conditions (Environmental conditions):

- Concrete screws subject to dry internal conditions: all screw types.
- Structural subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition no particular aggressive conditions exists: screw types made of stainless steel with marking A4.
- Structural subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition if particular aggressive conditions exists: screw types made of stainless steel with marking HCR.  
Note: Such particular aggressive conditions are e.g. permanent, alternating immersion in seawater or splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used).

Ramset™ AnkaScrew™ Xtrem™

**Intended use**  
Specification

**Annex B1**

## Specification of Intended use - continuation

### Design:

- Anchorages are to be designed under the responsibility of an engineer experienced in anchorages and concrete work.
- Verifiable calculation notes and drawings are to be prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e.g. position of the anchor relative to reinforcement or to supports, etc.).
- Anchorages are designed according to EN 1992-4:2018 and EOTA Technical Report TR 055. The design for shear load according to EN 1992-4:2018, Section 6.2.2 applies for all specified diameters  $d_f$  of clearance hole in the fixture in Annex B3, Table 4.

### Installation:

- Hammer drilling or hollow drilling; hollow drilling only for sizes 8-14.
- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters on site.
- In case of aborted hole: new drilling must be drilled at a minimum distance of twice the depth of aborted hole or closer, if the aborted hole is filled with high strength mortar and only if the hole is not in the direction of the oblique tensile or shear load.
- After installation further turning of the anchor must not be possible. The head of the anchor is supported in the fixture and is not damaged.
- The borehole may be filled with injection mortar
- Adjustability according to Annex B6 for sizes 8-14, all embedment depths
- Cleaning of borehole is not necessary, if using a hollow drill

Ramset™ AnkaScrew™ Xtrem™


**Intended use**  
Specification continuation

**Annex B2**

Table 4: Installation parameters

AnkaScrew Xtrem size		6		8			10		
Nominal embedment depth		$h_{\text{nom}}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$
		[mm]	40	55	45	55	65	55	75
Nominal drill hole diameter	$d_0$	[mm]	6			8			10
Cutting diameter of drill bit	$d_{\text{cut}} \leq$	[mm]	6,40			8,45			10,45
Drill hole depth	$h_0 \geq$	[mm]	45	60	55	65	75	65	85
Clearance hole diameter	$d_f \leq$	[mm]	8			12			14
Installation torque (version with connection thread)	$T_{\text{inst}}$	[Nm]	10			20			40
Torque impact screw driver		[Nm]	Max. torque according to manufacturer's instructions						
			160			300			400

AnkaScrew Xtrem size		12			14			
Nominal embedment depth		$h_{\text{nom}}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	
		[mm]	65	85	100	75	100	
Nominal drill hole diameter	$d_0$	[mm]	12			14		
Cutting diameter of drill bit	$d_{\text{cut}} \leq$	[mm]	12,50			14,50		
Drill hole depth	$h_0 \geq$	[mm]	75	95	110	85	110	125
Clearance hole diameter	$d_f \leq$	[mm]	16			18		
Installation torque (version with connection thread)	$T_{\text{inst}}$	[Nm]	60			80		
Torque impact screw driver		[Nm]	Max. torque according to manufacturer's instructions			650		
			650			650		

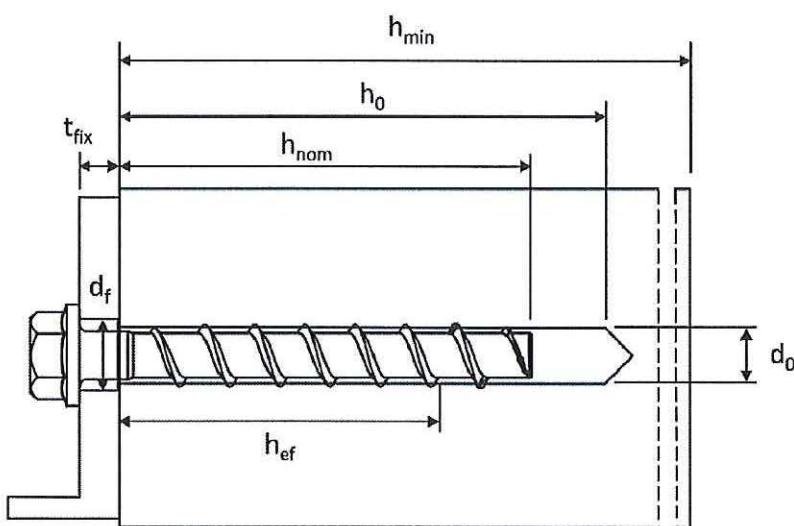


Ramset™ AnkaScrew™ Xtrem™

Intended use  
Installation parameters

Annex B3

Table 5: Minimum thickness of member, minimum edge distance and minimum spacing

AnkaScrew Xtrem size		6		8			10				
Nominal embedment depth	$h_{\text{nom}}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$		
	[mm]	40	55	45	55	65	55	75	85		
Minimum thickness of member	$h_{\min}$	[mm]			80			90	102		
Minimum edge distance	$c_{\min}$	[mm]	40		40		50		50		
Minimum spacing	$s_{\min}$	[mm]	40		40		50		50		
AnkaScrew Xtrem size		12			14						
Nominal embedment depth	$h_{\text{nom}}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$				
	[mm]	65	85	100	75	100	115				
Minimum thickness of member	$h_{\min}$	[mm]	80	101	120	87	119	138			
Minimum edge distance	$c_{\min}$	[mm]	50		70	50	70				
Minimum spacing	$s_{\min}$	[mm]	50		70	50	70				

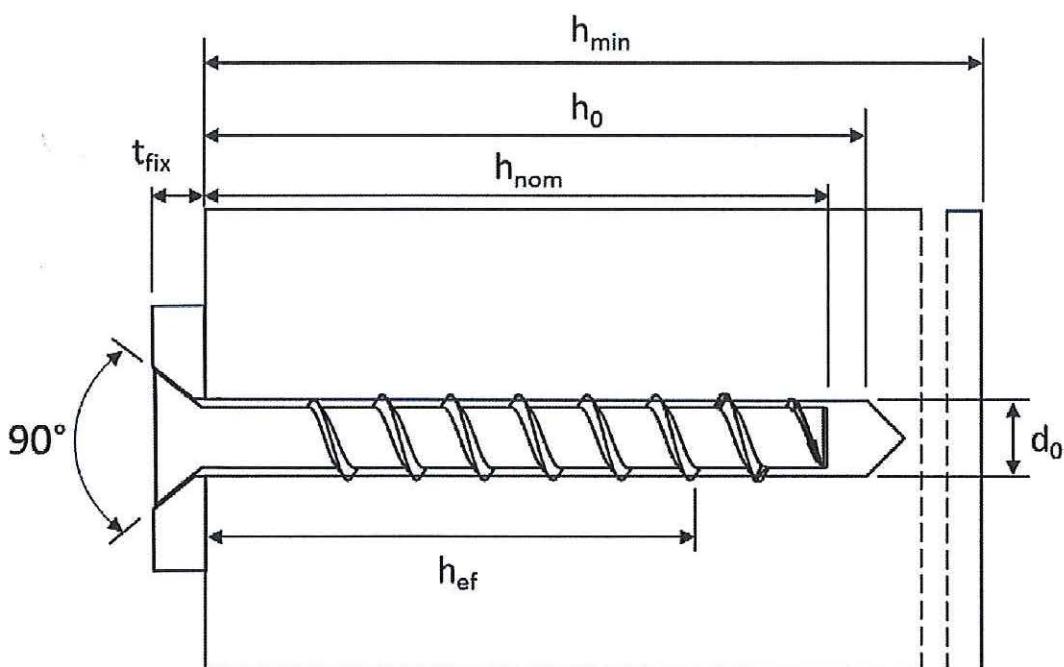


Ramset™ AnkaScrew™ Xtrem™

Intended use

Minimum thickness of member, minimum edge distance and minimum spacing

Annex B4

## Installation Instructions

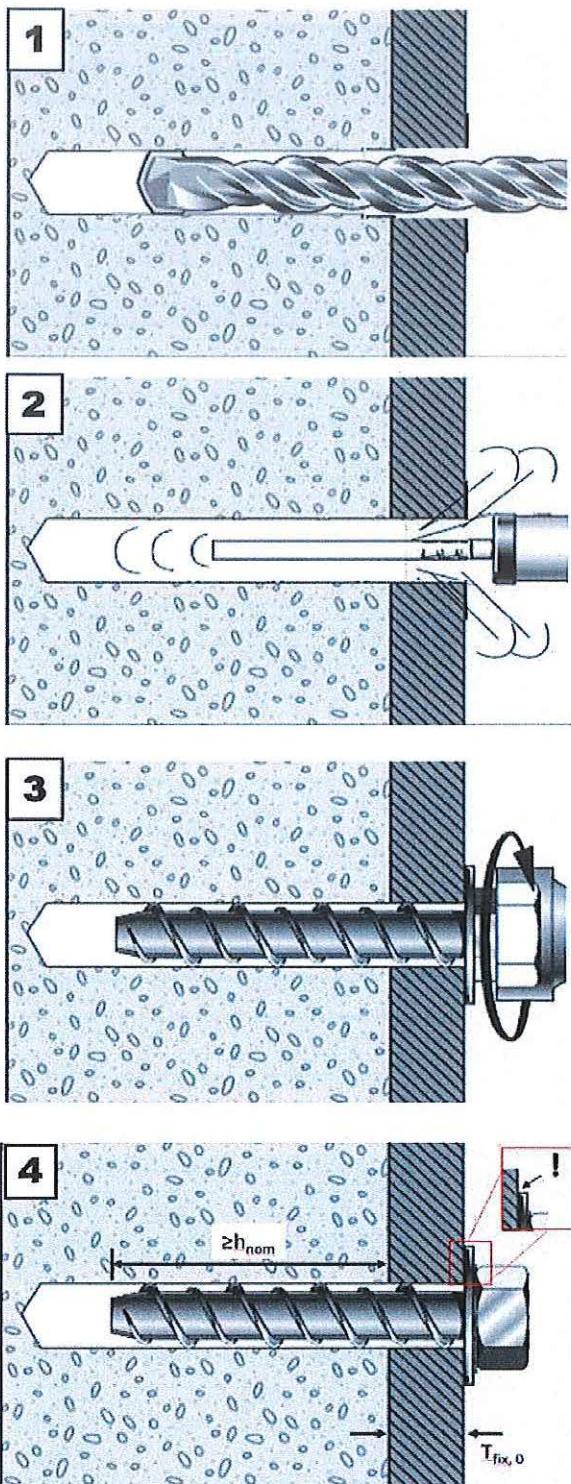

Create hammer drilled or  
hollow drilled borehole

Remove drill dust by  
vacuuming or blowing off

Install with torque  
impact screw driver  
or torque wrench

The head must be  
undamaged and in  
contact with the fixture


Ramset™ AnkaScrew™ Xtrem™

**Intended use**  
Installation instructions

Annex B5


## Installation Instructions – Adjustment

### 1. Adjustment

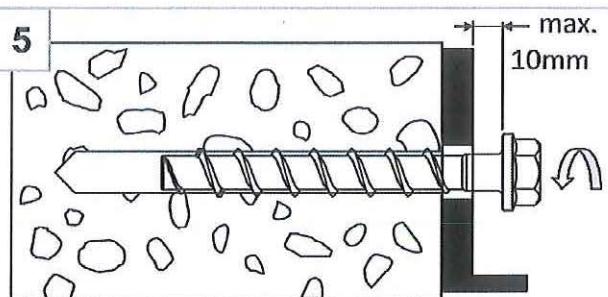


Screw may be untightened maximum 10mm


### 2. Adjustment

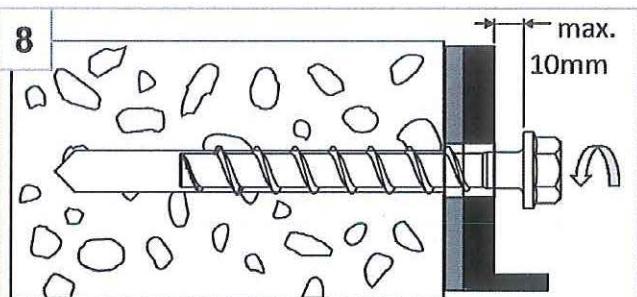


Screw may be untightened maximum 10mm

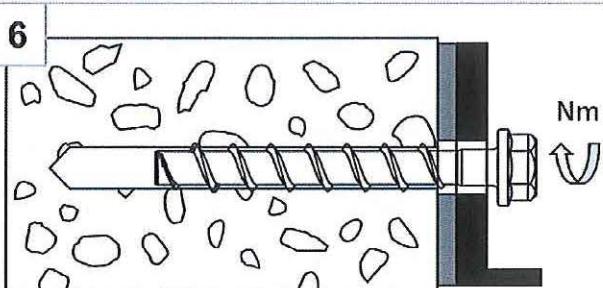


After adjustment, tighten the screw again

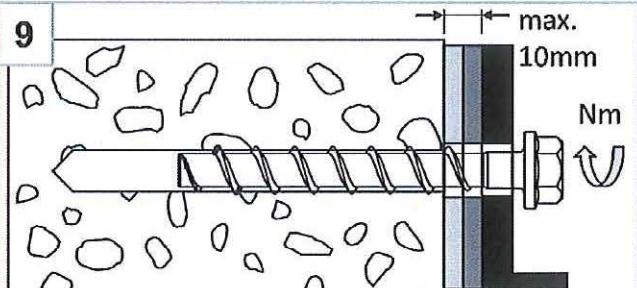

After adjustment, tighten the screw again

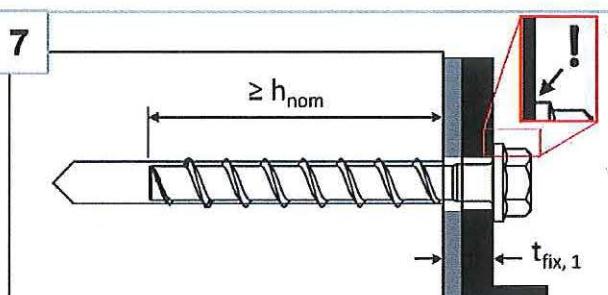

The head must be undamaged and in contact with the fixture

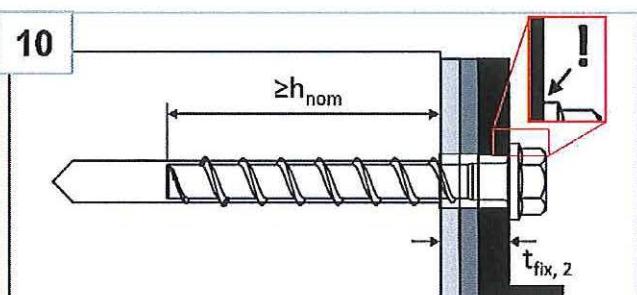

The head must be undamaged and in contact with the fixture

#### Note:

The fastener can be adjusted maximum two times. The total allowed thickness of shims added during the adjustment process is 10mm. The final embedment depth after adjustment process must be larger or equal than  $h_{nom}$ .


Ramset™ AnkaScrew™ Xtrem™

**Intended use**  
Installation instructions - Adjustment


Annex B6

## Installation Instructions – Filling annular gap


### Positioning of fixture and filling washer

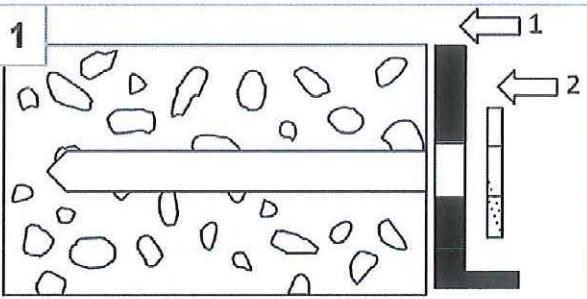


After preparing borehole (Annex B5, figure 1+2), position first fixture (1), then filling washer (2)

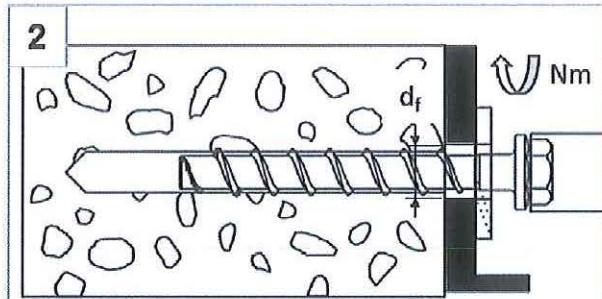

Install with torque impact screw driver  
or torque wrench

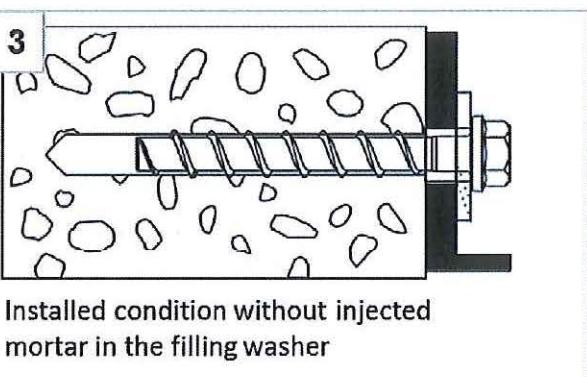


Installed condition without injected  
mortar in the filling washer

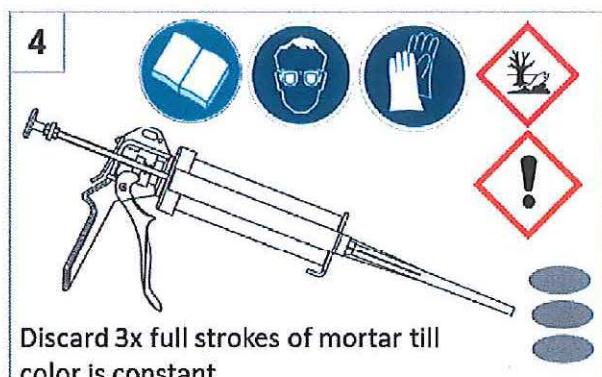

Discard 3x full strokes of mortar till  
color is constant

### Filling the annular gap

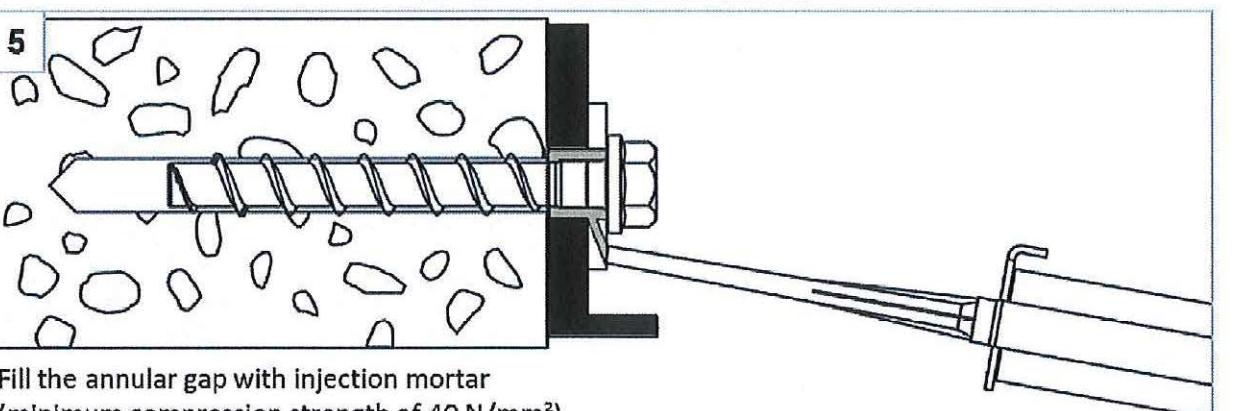

Fill the annular gap with injection mortar  
(minimum compression strength of  $40 \text{ N/mm}^2$ )

#### Note:

For seismic loading the installation with filled and without filled annular gap is approved.  
Differences in performance can be found in Annex C5 - C7.

Ramset™ AnkaScrew™ Xtrem™

Intended use

Installation instructions - Filling annular gap

Annex B7

Table 6: Characteristic values for static and quasi-static loading, sizes 6-10

AnkaScrew Xtrem size			6		8			10		
Nominal embedment depth	$h_{\text{nom}}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	
	[mm]	40	55	45	55	65	55	75	85	

Steel failure for tension and shear loading

Characteristic tension load	$N_{Rk,s}$	[kN]	14,0	27,0	45,0
Partial factor	$\gamma_{Ms,N}$	[-]		1,5	
Characteristic shear load	$V^0_{Rk,s}$	[kN]	7,0	13,5	17,0
Partial factor	$\gamma_{Ms,V}$	[-]		1,25	
Ductility factor	$k_7$	[-]		0,8	
Characteristic bending load	$M^0_{Rk,s}$	[Nm]	10,9	26,0	56,0

Pull-out failure

Characteristic tension load C20/25	cracked	$N_{Rk,p}$	[kN]	2,0	4,0	5,0	9,0	12,0	9,0	$\geq N^0_{Rk,c}$ <sup>1)</sup>
	uncracked	$N_{Rk,p}$	[kN]	4,0	9,0	7,5	12,0	16,0	12,0	20,0
Increasing factor for $N_{Rk,p}$	C25/30	$\Psi_c$	[-]				1,12			
	C30/37						1,22			
	C40/50						1,41			
	C50/60						1,58			

Concrete failure: Splitting failure, concrete cone failure and pry-out failure

Effective embedment depth	$h_{\text{ef}}$	[mm]	31	44	35	43	52	43	60	68
k-factor	cracked	$k_{cr}$	[-]				7,7			
	uncracked	$k_{ucr}$	[-]				11,0			
Concrete cone failure	spacing	$s_{cr,N}$	[mm]				3 x $h_{\text{ef}}$			
	edge distance	$c_{cr,N}$	[mm]				1,5 x $h_{\text{ef}}$			
Splitting failure	resistance	$N^0_{Rk,sp}$	[kN]	2,0	4,0	5,0	9,0	12,0	9,0	16,0
	spacing	$s_{cr,sp}$	[mm]	120	160	120	140	150	140	180
	edge distance	$c_{cr,sp}$	[mm]	60	80	60	70	75	70	90
Factor for pry-out failure	$k_8$	[-]				1,0			2,0	
Installation factor	$\gamma_{inst}$	[-]				1,0				

Concrete edge failure

Effective length in concrete	$l_f = h_{\text{ef}}$	[mm]	31	44	35	43	52	43	60	68
Nominal outer diameter of screw	$d_{\text{nom}}$	[mm]	6			8			10	

<sup>1)</sup>  $N^0_{Rk,c}$  according to EN 1992-4:2018

Ramset™ AnkaScrew™ Xtrem™

Performances

Characteristic values for static and quasi-static loading, sizes 6-10

Annex C1

Table 7: Characteristic values for static and quasi-static loading, sizes 12-14

AnkaScrew Xtrem size		12			14					
Nominal embedment depth	$h_{\text{nom}}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$			
	[mm]	65	85	100	75	100	115			
<b>Steel failure for tension and shear loading</b>										
Characteristic tension load	$N_{Rk,s}$	[kN]	67,0		94,0					
Partial factor	$\gamma_{Ms,N}$	[-]	1,5							
Characteristic shear load	$V^0_{Rk,s}$	[kN]	33,5	42,0	56,0					
Partial factor	$\gamma_{Ms,V}$	[-]	1,25							
Ductility factor	$k_7$	[-]	0,8							
Characteristic bending load	$M^0_{Rk,s}$	[Nm]	113,0		185,0					
<b>Pull-out failure</b>										
Characteristic tension load C20/25	cracked	$N_{Rk,p}$	[kN]	12,0	$\geq N^0_{Rk,c}$ <sup>1)</sup>					
	uncracked	$N_{Rk,p}$	[kN]	16,0						
Increasing factor for $N_{Rk,p}$	C25/30	$\Psi_c$	[-]	1,12						
	C30/37			1,22						
	C40/50			1,41						
	C50/60			1,58						
<b>Concrete failure: Splitting failure, concrete cone failure and pry-out failure</b>										
Effective embedment depth	$h_{\text{ef}}$	[mm]	50	67	80	58	79	92		
k-factor	cracked	$k_1 = k_{cr}$	[-]	7,7						
	uncracked	$k_1 = k_{ucr}$	[-]	11,0						
Concrete cone failure	spacing	$s_{cr,N}$	[mm]	3 x $h_{\text{ef}}$						
	edge distance	$c_{cr,N}$	[mm]	1,5 x $h_{\text{ef}}$						
Splitting failure	resistance	$N^0_{Rk,sp}$	[kN]	12,0	18,5	24,5	15,0	24,0	30,0	
	spacing	$s_{cr,sp}$	[mm]	150	210	240	180	240	280	
	edge distance	$c_{cr,sp}$	[mm]	75	105	120	90	120	140	
Factor for pry-out failure	$k_8$	[-]	1,0	2,0		1,0	2,0			
Installation factor	$\gamma_{inst}$	[-]	1,0							
<b>Concrete edge failure</b>										
Effective length in concrete	$l_f = h_{\text{ef}}$	[mm]	50	67	80	58	79	92		
Nominal outer diameter of screw	$d_{\text{nom}}$	[mm]	12			14				
1) $N^0_{Rk,c}$ according to EN 1992-4:2018										
<b>Ramset™ AnkaScrew™ Xtrem™</b>										
<b>Performances</b> Characteristic values for static and quasi-static loading, sizes 12-14						<b>Annex C2</b>				

Table 8: Seismic category C1 – Characteristic load values

AnkaScrew Xtrem size		6	8	10		12	14	
Nominal embedment depth	$h_{\text{nom}}$ [mm]	$h_{\text{nom}1}$ 40	$h_{\text{nom}2}$ 55	$h_{\text{nom}3}$ 65	$h_{\text{nom}1}$ 55	$h_{\text{nom}3}$ 85	$h_{\text{nom}3}$ 100	$h_{\text{nom}3}$ 115
<b>Steel failure for tension and shear load</b>								
Characteristic load	$N_{Rk,s,\text{eq}}$ [kN]	14,0	27,0	45,0	67,0	94,0		
Partial factor	$\gamma_{Ms,\text{eq}}$ [-]			1,5				
Characteristic load	$V_{Rk,s,\text{eq}}$ [kN]	4,7	5,5	8,5	13,5	15,3	21,0	22,4
Partial factor	$\gamma_{Ms,\text{eq}}$ [-]			1,25				
With filling of the annular gap <sup>1)</sup>	$\alpha_{\text{gap}}$ [-]			1,0				
Without filling of the annular gap	$\alpha_{\text{gap}}$ [-]			0,5				
<b>Pull-out failure</b>								
Characteristic tension load in cracked concrete C20/25	$N_{Rk,p,\text{eq}}$ [kN]	2,0	4,0	12,0	9,0		$\geq N_{Rk,c}^0$ <sup>2)</sup>	
<b>Concrete cone failure</b>								
Effective embedment depth	$h_{\text{ef}}$ [mm]	31	44	52	43	68	80	92
Edge distance	$c_{cr,N}$ [mm]				1,5 x $h_{\text{ef}}$			
Spacing	$s_{cr,N}$ [mm]				3 x $h_{\text{ef}}$			
Installation factor	$\gamma_{\text{inst}}$ [-]				1,0			
<b>Concrete pry-out failure</b>								
Factor for pry-out failure	$k_8$ [-]		1,0				2,0	
<b>Concrete edge failure</b>								
Effective length in concrete	$l_f = h_{\text{ef}}$ [mm]	31	44	52	43	68	80	92
Nominal outer diameter of screw	$d_{\text{nom}}$ [mm]	6	6	8	10	10	12	14
1) Filling of the annular gap according to annex B7, figure 5								
2) $N_{Rk,c}^0$ according to EN 1992-4:2018								
<b>Ramset™ AnkaScrew™ Xtrem™</b>								
<b>Performances</b> Seismic category C1 – Characteristic load values							<b>Annex C3</b>	

**Table 9: Seismic category C2<sup>1)</sup> – Characteristic load values with filled annular gap according to annex B7, figure 5**

AnkaScrew Xtrem size		8	10	12	14
Nominal embedment depth	$h_{\text{nom}}$	$h_{\text{nom3}}$			
	[mm]	65	85	100	115
<b>Steel failure for tension</b>					
Characteristic load	$N_{Rk,s,\text{eq}}$	[kN]	27,0	45,0	67,0
Partial factor	$\gamma_{Ms,\text{eq}}$	[-]		1,5	
With filling of the annular gap	$\alpha_{\text{gap}}$	[-]		1,0	
<b>Pull-out failure</b>					
Characteristic load in cracked concrete	$N_{Rk,p,\text{eq}}$	[kN]	2,4	5,4	7,1
<b>Steel failure for shear load</b>					
Characteristic load	$V_{Rk,s,\text{eq}}$	[kN]	9,9	18,5	31,6
Partial factor	$\gamma_{Ms,\text{eq}}$	[-]		1,25	
With filling of the annular gap	$\alpha_{\text{gap}}$	[-]		1,0	
<b>Concrete cone failure</b>					
Effective embedment depth	$h_{\text{ef}}$	[mm]	52	68	80
Edge distance	$c_{cr,N}$	[mm]		1,5 x $h_{\text{ef}}$	
Spacing	$s_{cr,N}$	[mm]		3 x $h_{\text{ef}}$	
Installation factor	$\gamma_{\text{inst}}$	[-]		1,0	
<b>Concrete pry-out failure</b>					
Factor for pry-out failure	$k_8$	[-]	1,0		2,0
<b>Concrete edge failure</b>					
Effective length in concrete	$l_f = h_{\text{ef}}$	[mm]	52	68	80
Nominal outer diameter of screw	$d_{\text{nom}}$	[mm]	8	10	12
1) A4 and HCR not suitable					
<b>Ramset™ AnkaScrew™ Xtrem™</b>					
<b>Performances</b>					
Seismic category C2 – Characteristic load values with filled annular gap					
<b>Annex C4</b>					

Table 10: Seismic category C2<sup>1)</sup> – Characteristic load values **without filled annular gap according to annex B7, figure 3**

AnkaScrew Xtrem size		8	10	12	14		
Nominal embedment depth	$h_{\text{nom}}$ [mm]	$h_{\text{nom3}}$					
	65	85	100	115			
<b>Steel failure for tension (hexagon head type)</b>							
Characteristic load	$N_{Rk,s,\text{eq}}$ [kN]	27,0	45,0	67,0	94,0		
Partial factor	$\gamma_{Ms,\text{eq}}$ [-]			1,5			
<b>Pull-out failure (hexagon head type)</b>							
Characteristic load in cracked concrete	$N_{Rk,p,\text{eq}}$ [kN]	2,4	5,4	7,1	10,5		
<b>Steel failure for shear load (hexagon head type)</b>							
Characteristic load	$V_{Rk,s,\text{eq}}$ [kN]	10,3	21,9	24,4	23,3		
Partial factor	$\gamma_{Ms,\text{eq}}$ [-]			1,25			
Without filling of the annular gap	$\alpha_{\text{gap}}$ [-]			0,5			
<b>Steel failure for tension (countersunk head type)</b>							
Characteristic load	$N_{Rk,s,\text{eq}}$ [kN]	27,0	45,0	no performance assessed			
Partial factor	$\gamma_{Ms,\text{eq}}$ [-]	1,5					
<b>Pull-out failure (countersunk head type)</b>							
Characteristic load in cracked concrete	$N_{Rk,p,\text{eq}}$ [kN]	2,4	5,4	no performance assessed			
<b>Steel failure for shear load (countersunk head type)</b>							
Characteristic load	$V_{Rk,s,\text{eq}}$ [kN]	3,6	13,7				
Partial factor	$\gamma_{Ms,\text{eq}}$ [-]	1,25					
Without filling of the annular gap	$\alpha_{\text{gap}}$ [-]	0,5					
<b>Concrete cone failure</b>							
Effective embedment depth	$h_{\text{ef}}$ [mm]	52	68	80	92		
Edge distance	$c_{\text{cr},N}$ [mm]			1,5 x $h_{\text{ef}}$			
Spacing	$s_{\text{cr},N}$ [mm]			3 x $h_{\text{ef}}$			
Installation factor	$\gamma_{\text{inst}}$ [-]			1,0			
<b>Concrete pry-out failure</b>							
Factor for pry-out failure	$k_8$ [-]	1,0		2,0			
<b>Concrete edge failure</b>							
Effective length in concrete	$l_f = h_{\text{ef}}$ [mm]	52	68	80	92		
Nominal outer diameter of screw	$d_{\text{nom}}$ [mm]	8	10	12	14		

<sup>1)</sup> A4 and HCR not suitable

Ramset™ AnkaScrew™ Xtrem™	Annex C5
<b>Performances</b> Seismic category C2 – Characteristic load values without filled annular gap	

Table 11: Fire exposure – characteristic values of resistance

AnkaScrew Xtrem size			6		8			10			12			14															
Nominal embedment depth		$h_{\text{nom}}$	1	2	1	2	3	1	2	3	1	2	3	1	2	3													
<b>Steel failure for tension and shear load</b>																													
characteristic Resistance	R30	$N_{Rk,s,fi30}$	[kN]	0,9		2,4		4,4		7,3		10,3																	
	R60	$N_{Rk,s,fi60}$	[kN]	0,8		1,7		3,3		5,8		8,2																	
	R90	$N_{Rk,s,fi90}$	[kN]	0,6		1,1		2,3		4,2		5,9																	
	R120	$N_{Rk,s,fi120}$	[kN]	0,4		0,7		1,7		3,4		4,8																	
	R30	$V_{Rk,s,fi30}$	[kN]	0,9		2,4		4,4		7,3		10,3																	
	R60	$V_{Rk,s,fi60}$	[kN]	0,8		1,7		3,3		5,8		8,2																	
	R90	$V_{Rk,s,fi90}$	[kN]	0,6		1,1		2,3		4,2		5,9																	
	R120	$V_{Rk,s,fi120}$	[kN]	0,4		0,7		1,7		3,4		4,8																	
	R30	$M^0_{Rk,s,fi30}$	[Nm]	0,7		2,4		5,9		12,3		20,4																	
	R60	$M^0_{Rk,s,fi60}$	[Nm]	0,6		1,8		4,5		9,7		15,9																	
	R90	$M^0_{Rk,s,fi90}$	[Nm]	0,5		1,2		3,0		7,0		11,6																	
	R120	$M^0_{Rk,s,fi120}$	[Nm]	0,3		0,9		2,3		5,7		9,4																	
<b>Pull-out failure</b>																													
Characteristic Resistance	R30- R90	$N_{Rk,p,fi}$	[kN]	0,5	1,0	1,3	2,3	3,0	2,3	4,0	4,8	3,0	4,7	6,2	3,8	6,0	7,6												
	R120	$N_{Rk,p,fi}$	[kN]	0,4	0,8	1,0	1,8	2,4	1,8	3,2	3,9	2,4	3,8	4,9	3,0	4,8	6,1												
<b>Concrete cone failure</b>																													
Characteristic Resistance	R30- R90	$N^0_{Rk,c,fi}$	[kN]	0,9	2,2	1,2	2,1	3,4	2,1	4,8	6,6	3,0	6,3	9,9	4,4	9,6	14,0												
	R120	$N^0_{Rk,c,fi}$	[kN]	0,7	1,8	1,0	1,7	2,7	1,7	3,8	5,3	2,4	5,1	7,9	3,5	7,6	11,2												
<b>Edge distance</b>																													
R30 bis R120		$c_{cr,fi}$	[mm]	$2 \times h_{\text{ef}}$																									
In case of fire attack from more than one side, the minimum edge distance shall be $\geq 300\text{mm}$ .																													
<b>Spacing</b>																													
R30 bis R120		$s_{cr,fi}$	[mm]	$4 \times h_{\text{ef}}$																									
<b>Pry-out failure</b>																													
R30 bis R120		$k_8$	[-]	1,0			2,0			1,0			2,0			1,0													
The anchorage depth has to be increased for wet concrete by at least 30 mm compared to the given value.																													

Ramset™ AnkaScrew™ Xtrem™

### Performances

Fire exposure – characteristic values of resistance

Annex C6

Table 12: Displacements under static and quasi-static tension load

AnkaScrew Xtrem size			6		8			10			
Nominal embedment depth			$h_{\text{nom}}$ [mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	
			40	55	45	55	65	55	75	85	
Cracked concrete	tension load	N	[kN]	0,95	1,9	2,4	4,3	5,7	4,3	7,9	
	displacement	$\delta_{N0}$	[mm]	0,3	0,6	0,6	0,7	0,8	0,6	0,5	
		$\delta_{N\infty}$	[mm]	0,4	0,4	0,6	1,0	0,9	0,4	1,2	
Uncracked concrete	tension load	N	[kN]	1,9	4,3	3,6	5,7	7,6	5,7	9,5	
	displacement	$\delta_{N0}$	[mm]	0,4	0,6	0,7	0,9	0,5	0,7	1,1	
		$\delta_{N\infty}$	[mm]	0,4	0,4	0,6	1,0	0,9	0,4	1,2	
AnkaScrew Xtrem size			12				14				
Nominal embedment depth			$h_{\text{nom}}$ [mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$		
			65	85	100		75	100	115		
Cracked concrete	tension load	N	[kN]	5,7	9,4	12,3	7,6	12,0		15,1	
	displacement	$\delta_{N0}$	[mm]	0,9	0,5	1,0	0,5	0,8		0,7	
		$\delta_{N\infty}$	[mm]	1,0	1,2	1,2	0,9	1,2		1,0	
Uncracked concrete	tension load	N	[kN]	7,6	13,2	17,2	10,6	16,9		21,2	
	displacement	$\delta_{N0}$	[mm]	1,0	1,1	1,2	0,9	1,2		0,8	
		$\delta_{N\infty}$	[mm]	1,0	1,2	1,2	0,9	1,2		1,0	

Table 13: Displacements under static and quasi-static shear load

AnkaScrew Xtrem size			6		8			10			
Nominal embedment depth			$h_{\text{nom}}$ [mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	
			40	55	45	55	65	55	75	85	
Cracked and uncracked concrete	shear load	V	[kN]	3,3		8,6		16,2			
	displacement	$\delta_{v0}$	[mm]	1,55		2,7		2,7			
		$\delta_{v\infty}$	[mm]	3,1		4,1		4,3			
AnkaScrew Xtrem size			12				14				
Nominal embedment depth			$h_{\text{nom}}$ [mm]	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$	$h_{\text{nom}1}$	$h_{\text{nom}2}$	$h_{\text{nom}3}$		
			65	85	100		75	100	115		
Cracked and uncracked concrete	shear load	V	[kN]	20,0			30,5				
	displacement	$\delta_{v0}$	[mm]	4,0			3,1				
		$\delta_{v\infty}$	[mm]	6,0			4,7				

Ramset™ AnkaScrew™ Xtrem™

## Performances

Displacements under static and quasi-static loads

## Annex C7

**Table 14: Seismic category C2<sup>1)</sup> – Displacements with filled annular gap according to annex B7, figure 5**

AnkaScrew Xtrem size		8	10	12	14
Nominal embedment depth	$h_{\text{nom}}$	$h_{\text{nom}3}$			
	[mm]	65	85	100	115
<b>Displacements under tension loads (hexagon head type)</b>					
Displacement DLS	$\delta_{N,\text{eq}(DLS)}$	[mm]	0,66	0,32	0,57
Displacement ULS	$\delta_{N,\text{eq}(ULS)}$	[mm]	1,74	1,36	2,36
<b>Displacements under shear loads (hexagon head type with hole clearance)</b>					
Displacement DLS	$\delta_{V,\text{eq}(DLS)}$	[mm]	1,68	2,91	1,88
Displacement ULS	$\delta_{V,\text{eq}(ULS)}$	[mm]	5,19	6,72	5,37

**Table 15: Seismic category C2<sup>1)</sup> – Displacements without filled annular gap according to annex B7, figure 3**

AnkaScrew Xtrem size		8	10	12	14
Nominal embedment depth	$h_{\text{nom}}$	$h_{\text{nom}3}$			
	[mm]	65	85	100	115
<b>Displacements under tension loads (hexagon head type)</b>					
Displacement DLS	$\delta_{N,\text{eq}(DLS)}$	[mm]	0,66	0,32	0,57
Displacement ULS	$\delta_{N,\text{eq}(ULS)}$	[mm]	1,74	1,36	2,36
<b>Displacements under tension loads (countersunk head type)</b>					
Displacement DLS	$\delta_{N,\text{eq}(DLS)}$	[mm]	0,66	0,32	no performance assessed
Displacement ULS	$\delta_{N,\text{eq}(ULS)}$	[mm]	1,74	1,36	
<b>Displacements under shear loads (hexagon head type with hole clearance)</b>					
Displacement DLS	$\delta_{V,\text{eq}(DLS)}$	[mm]	4,21	4,71	4,42
Displacement ULS	$\delta_{V,\text{eq}(ULS)}$	[mm]	7,13	8,83	6,95
<b>Displacements under shear loads (countersunk head type with hole clearance)</b>					
Displacement DLS	$\delta_{V,\text{eq}(DLS)}$	[mm]	2,51	2,98	no performance assessed
Displacement ULS	$\delta_{V,\text{eq}(ULS)}$	[mm]	7,76	6,25	

<sup>1)</sup> A4 and HCR not suitable

Ramset™ AnkaScrew™ Xtrem™

**Performances**

Displacements under seismic loads

**Annex C8**